


## N-Channel Power MOSFET

### ● Features:


- 20.0A, 650V,  $R_{DS(on)(Typ)} = 0.38\Omega @ V_{GS}=10V$
- Low Gate Charge
- Low  $C_{rss}$
- 100% Avalanche Tested
- Fast Switching
- Improved dv/dt Capability

### ● Application:

- High Frequency Switching Mode Power Supply
- Active Power Factor Correction



Schematic diagram



TO-220F

### Absolute Maximum Ratings ( $T_c=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{DSS}$	Drain-Source Voltage	650	V
$I_D$	Drain Current - Continuous ( $T_c=25^\circ\text{C}$ ) - Continuous ( $T_c=100^\circ\text{C}$ )	20.0*	A
		12.5*	A
$I_{DM}$	Drain Current - Pulsed (Note1)	80*	A
$V_{GSS}$	Gate-Source Voltage	$\pm 30$	V
$E_{AS}$	Single Pulsed Avalanche Energy (Note2)	1280	mJ
$I_{AR}$	Avalanche Current (Note1)	20.0	A
$E_{AR}$	Repetitive Avalanche Energy (Note1)	37	mJ
dv/dt	Peak Diode Recovery dv/dt (Note3)	4.5	V/ns
$P_D$	Power Dissipation ( $T_c = 25^\circ\text{C}$ ) - Derate above $25^\circ\text{C}$	74	W
		0.59	W/ $^\circ\text{C}$
$T_j$	Operating Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55 to +150	$^\circ\text{C}$

\* Drain Current Limited by Maximum Junction Temperature.

### Thermal Characteristics

Symbol	Parameter	Max	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.69	$^\circ\text{C} / \text{W}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ\text{C} / \text{W}$


**Electrical Characteristics**(Tc=25°C unless otherwise noted)

Symbol	Parameter	Test Conditons	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
BV <sub>DSS</sub>	Drain-source Breakdown Voltage	V <sub>GS</sub> =0V ,I <sub>D</sub> =250μA	650	--	--	V
ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>	Breakdown Voltage Temperature Coefficient	I <sub>D</sub> =250μA (Referenced to 25°C)	--	0.7	--	V/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =650V,V <sub>GS</sub> =0V	--	--	1	μA
		V <sub>DS</sub> =520V,Tc=125°C	--	--	10	μA
I <sub>GSSF</sub>	Gate-Body Leakage Current,Forward	V <sub>GS</sub> =+30V, V <sub>DS</sub> =0V	--	--	100	nA
I <sub>GSSR</sub>	Gate-Body Leakage Current,Reverse	V <sub>GS</sub> =-30V, V <sub>DS</sub> =0V	--	--	-100	nA
<b>On Characteristics</b>						
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> =250μA	2.0	--	3.5	V
R <sub>DS(on)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> =10 V, I <sub>D</sub> =10.0A	--	0.38	0.47	Ω
g <sub>FS</sub>	Forward Transconductance	V <sub>DS</sub> =40 V, I <sub>D</sub> =10.0A (Note4)	--	18.0	--	S
<b>Dynamic Characteristics</b>						
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> =25V,V <sub>GS</sub> =0V, f=1.0MHz	--	2650	--	pF
C <sub>oss</sub>	Output Capacitance		--	282	--	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		--	6.3	--	pF
<b>Switching Characteristics</b>						
t <sub>d(on)</sub>	Turn-On Delay Time	V <sub>DD</sub> = 325 V, I <sub>D</sub> = 20A, R <sub>G</sub> = 25 Ω (Note4,5)	--	26.5	--	ns
t <sub>r</sub>	Turn-On Rise Time		--	43.6	--	ns
t <sub>d(off)</sub>	Turn-Off Delay Time		--	81.3	--	ns
t <sub>f</sub>	Turn-Off Fall Time		--	43.2	--	ns
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> = 520 V, I <sub>D</sub> =20A, V <sub>GS</sub> = 10 V (Note4,5)	--	46.8	--	nC
Q <sub>gs</sub>	Gate-Source Charge		--	13.9	--	nC
Q <sub>gd</sub>	Gate-Drain Charge		--	14.2	--	nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
I <sub>S</sub>	Maximum Continuous Drain-Source Diode Forward Current		--	--	20	A
I <sub>SM</sub>	Maximum Pulsed Drain-Source Diode Forward Current		--	--	80	A
V <sub>SD</sub>	Drain-Source Diode Forward Voltage	V <sub>GS</sub> =0V,I <sub>S</sub> =20A	--	--	1.3	V
t <sub>rr</sub>	Reverse Recovery Time	V <sub>GS</sub> =0V, I <sub>S</sub> =20A, d I <sub>F</sub> /dt=100A/μs (Note4)	--	590	--	ns
Q <sub>rr</sub>	Reverse Recovery Charge		--	7.58	--	μC


**Notes:**

- 1、 Repetitive Rating:Pulse Width Limited by Maximum Junction Temperature.
- 2、 L = 5.0mH, I<sub>AS</sub> =20.0A, V<sub>DD</sub> = 50V, R<sub>G</sub> = 25 Ω, Starting T<sub>J</sub> = 25°C.
- 3、 I<sub>SD</sub>≤20.0A, di/dt≤200A/μs, V<sub>DD</sub>≤BV<sub>DSS</sub>, Starting T<sub>J</sub> = 25°C.
- 4、 Pulse Test : Pulse Width ≤300 μ s, Duty Cycle≤2%.
- 5、 Essentially Independent of Operating Temperature.


## On-Regin Characteristics

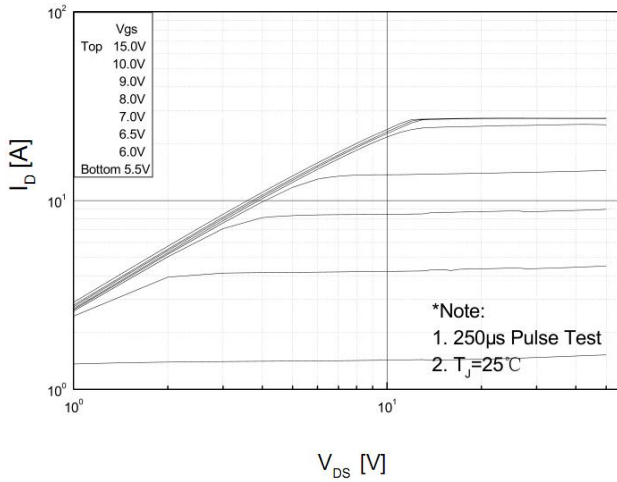


## Transfer Characteristics

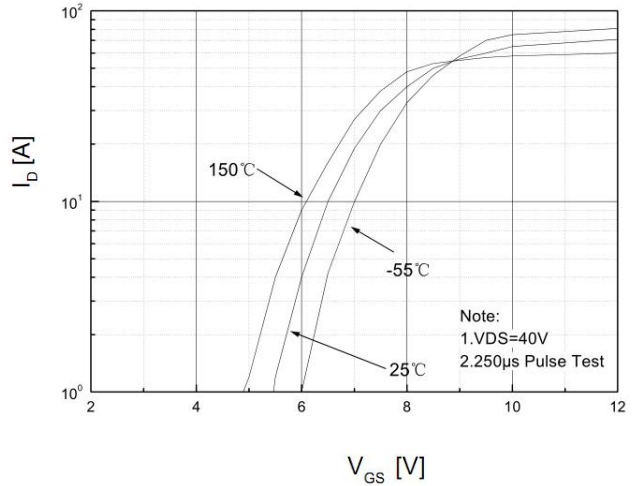


## On-Resistance Variation vs. Drain Current and Gate Voltage

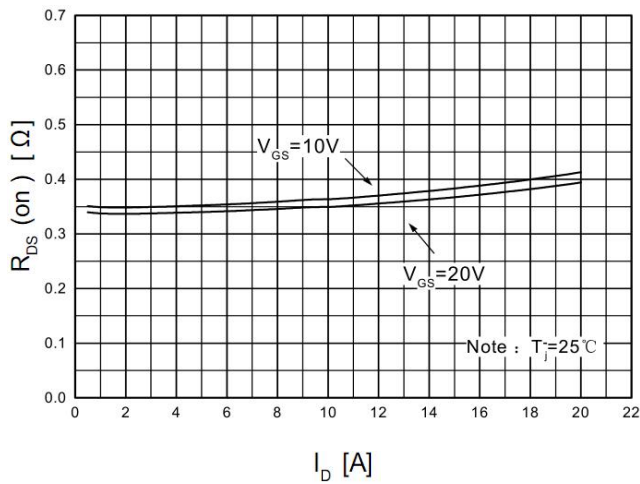


## Body Diode Forward Voltage Variation vs. Source Current and Temperature

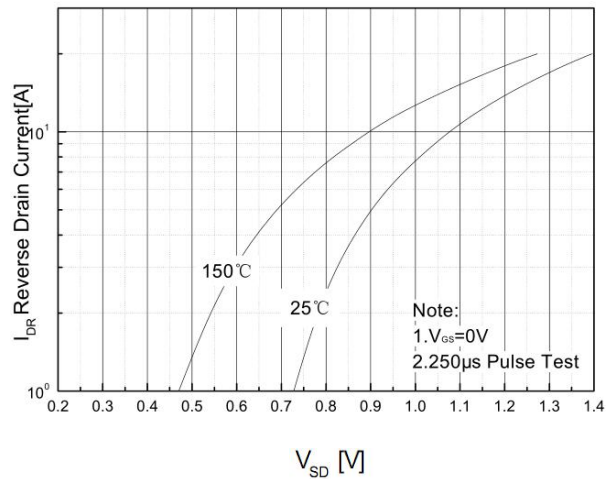


## Capacitance Characteristics

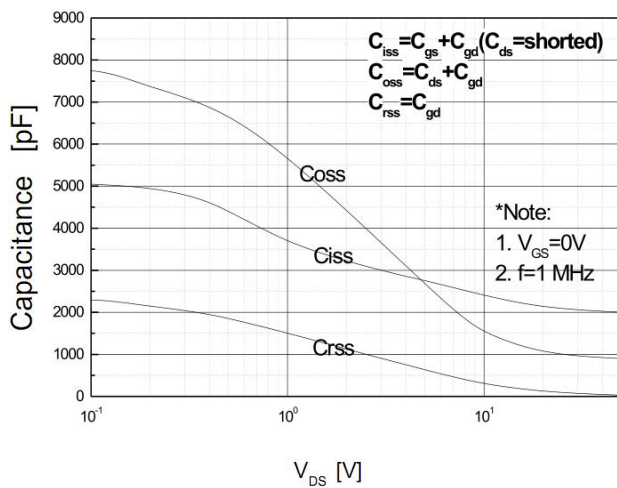


## Gate Charge Characteristics

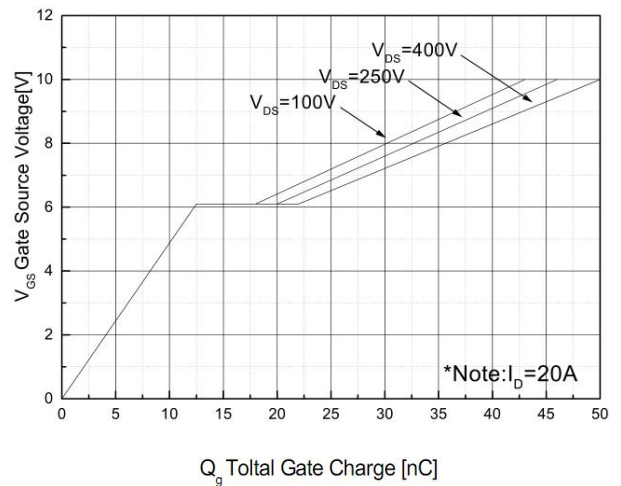


### Breakdown Voltage Variation vs. Temperature

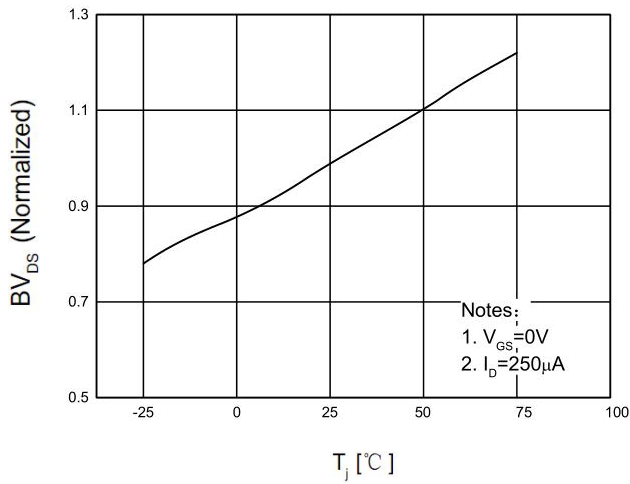


### On-Resistance Variation vs. Temperature

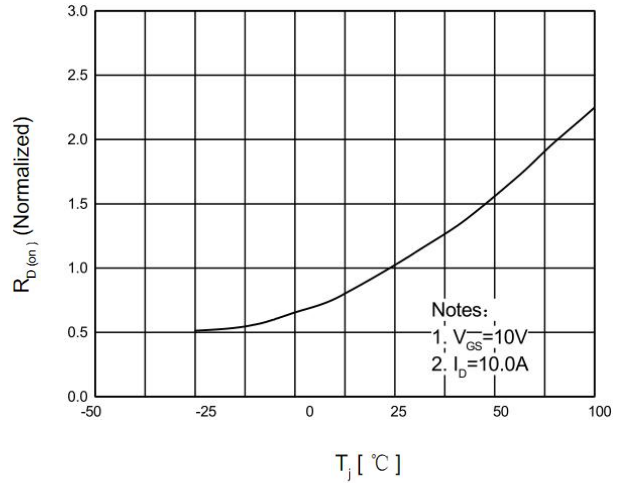

### Maximum Safe Operating Area

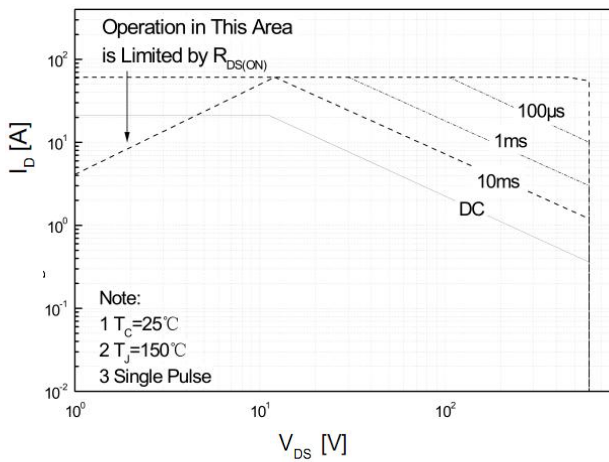

### Maximum Drain Current Vs. Case Temperature

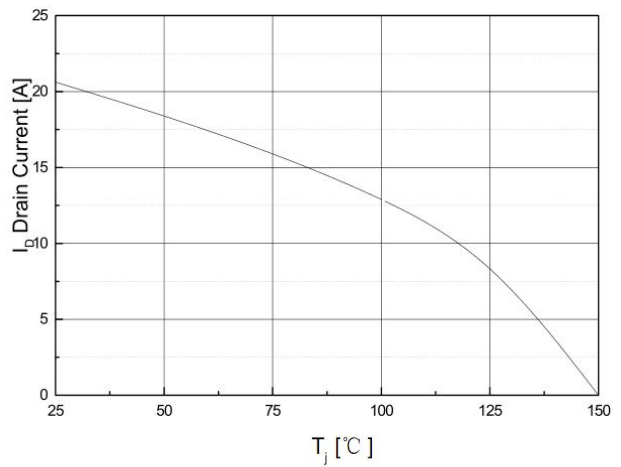

### TO-220F Package Dimensions

UNIT: mm

SYMBOL	min	nom	max	SYMBOL	min	nom	max
A	9.80		10.60	D		2.54	
A1		7.00		D1	1.15		1.55
A2	2.90		3.40	D2	0.60		1.00
A3	9.10		9.90	D3	0.20		0.50
B1	15.40		16.40	E	2.24		2.84
B2	4.35		4.95	E1		0.70	
B3	6.00		7.40	E2		1.0×45°	
C	3.00		3.70	E3	0.35		0.65
C1	15.00		17.00	E4	2.30		3.30
C2	8.80		10.80	α		30°	

